



Message Implementation Guideline

REGENT-ORDRSP

based on

ORDRSP

Purchase order response message

EANCOM 1997

Version: 1p0
Issue date: 13.11.2019
Author: ecosio GmbH

1 Message Structure	2
2 Branching Diagram	4
3 Segments	10

Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0000	1	UNA	C	1	0	Service string advice
0000	2	UNB	M	1	0	INTERCHANGE HEADER
0010	3	UNH	M	1	0	MESSAGE HEADER
0020	4	BGM	M	1	0	Beginning of message
0030	5	DTM	M	35	1	Date/time/period
0080		SG1	M	10	1	RFF-DTM
0090	6	RFF	M	1	1	Reference
0100	7	DTM	M	5	2	Date/time/period
0140		SG3	C	99	1	NAD
0150	8	NAD	M	1	1	Name and address
0140		SG3	C	99	1	NAD-SG6
0150	9	NAD	M	1	1	Name and address
0240		SG6	C	5	2	CTA-COM-COM
0250	10	CTA	M	1	2	Contact information
0260	11	COM	C	5	3	Communication contact
0260	12	COM	C	5	3	Communication contact
0140		SG3	C	99	1	NAD
0150	13	NAD	M	1	1	Name and address
0310		SG8	C	5	1	CUX
0320	14	CUX	M	1	1	Currencies
0450		SG12	C	5	1	TOD
0460	15	TOD	M	1	1	Terms of delivery or transport
0960		SG26	C	200000	1	LIN-PIA-PIA-IMD-IMD-IMD-IMD-QTY-QTY-DTM-SG30-SG41
0970	16	LIN	M	1	1	Line item
0980	17	PIA	C	25	2	Additional product id
0980	18	PIA	C	25	2	Additional product id
0990	19	IMD	C	99	2	Item description
0990	20	IMD	C	99	2	Item description
0990	21	IMD	C	99	2	Item description
0990	22	IMD	C	99	2	Item description
1010	23	QTY	C	10	2	Quantity
1010	24	QTY	M	10	2	Quantity
1040	25	DTM	M	35	2	Date/time/period
1240		SG30	C	25	2	PRI
1250	26	PRI	M	1	2	Price details
1660		SG41	C	99	2	ALC
1670	27	ALC	M	1	2	Allowance or charge
2150	28	UNS	M	1	0	SECTION CONTROL
2160	29	MOA	C	12	1	Monetary amount

Counter = Counter of segment/group within the standard
No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group


St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Content
2220	30	UNT	M	1	0	MESSAGE TRAILER
0000	31	UNZ	M	1	0	INTERCHANGE TRAILER

Counter = Counter of segment/group within the standard
No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Branching Diagram of Used Segments/Groups

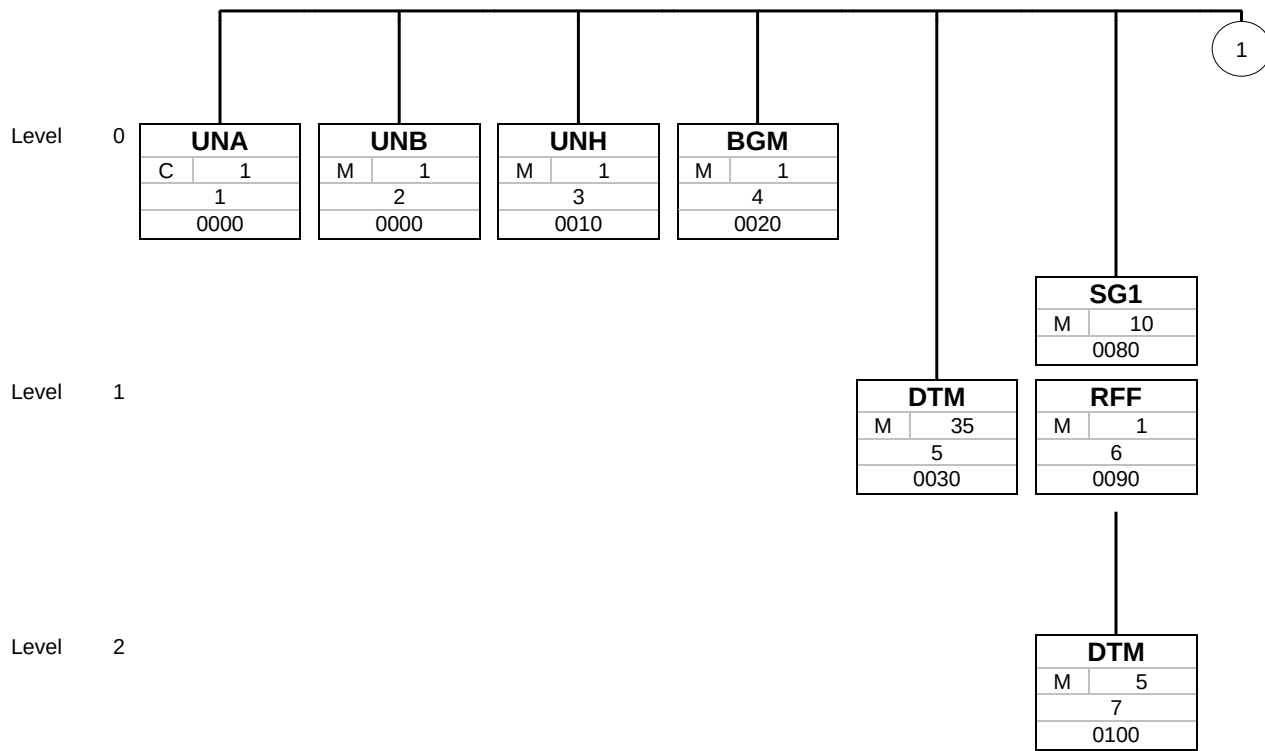

Tag
St MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number

Counter = Counter of segment/group within the standard

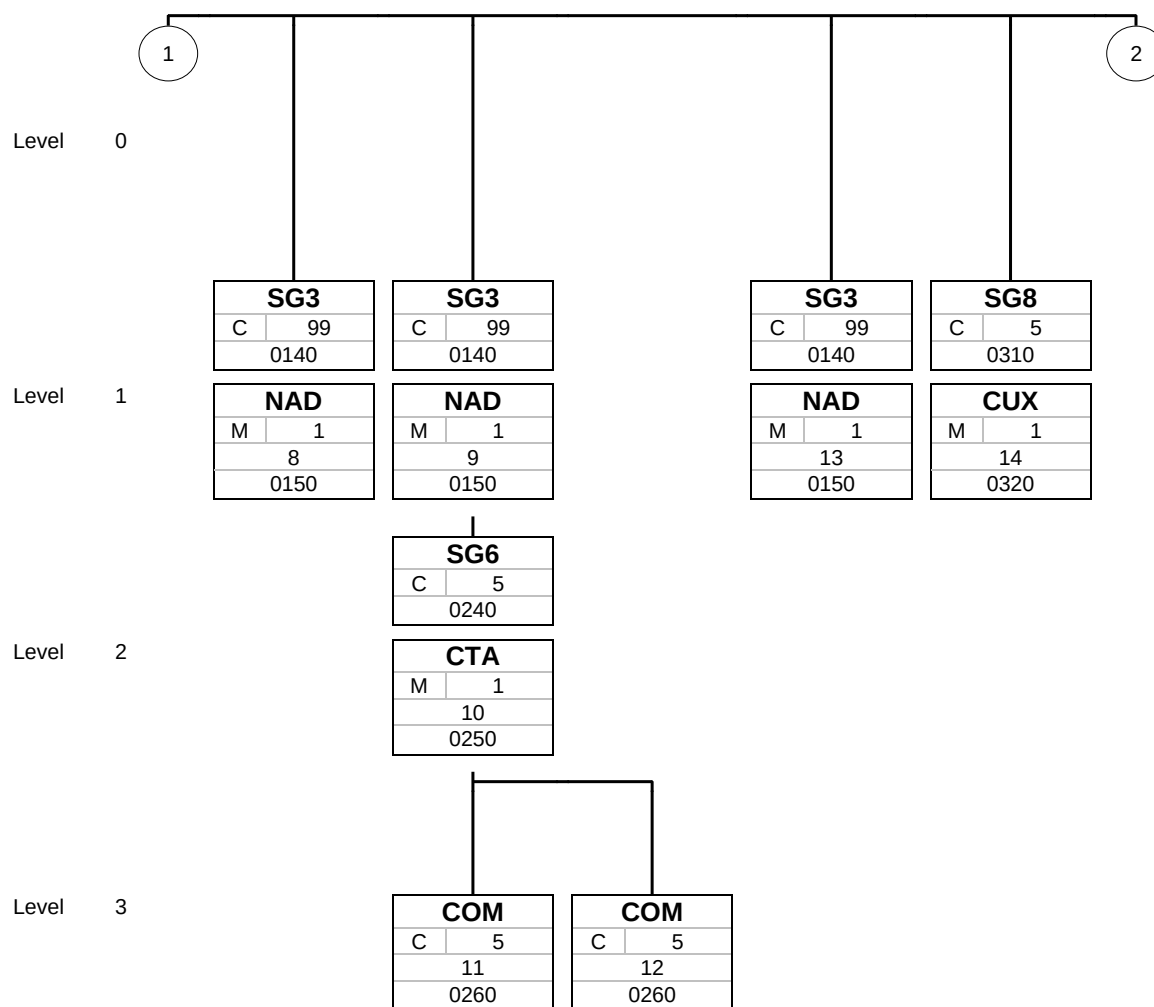

Tag
St MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group


No = Consecutive segment number

Counter = Counter of segment/group within the standard

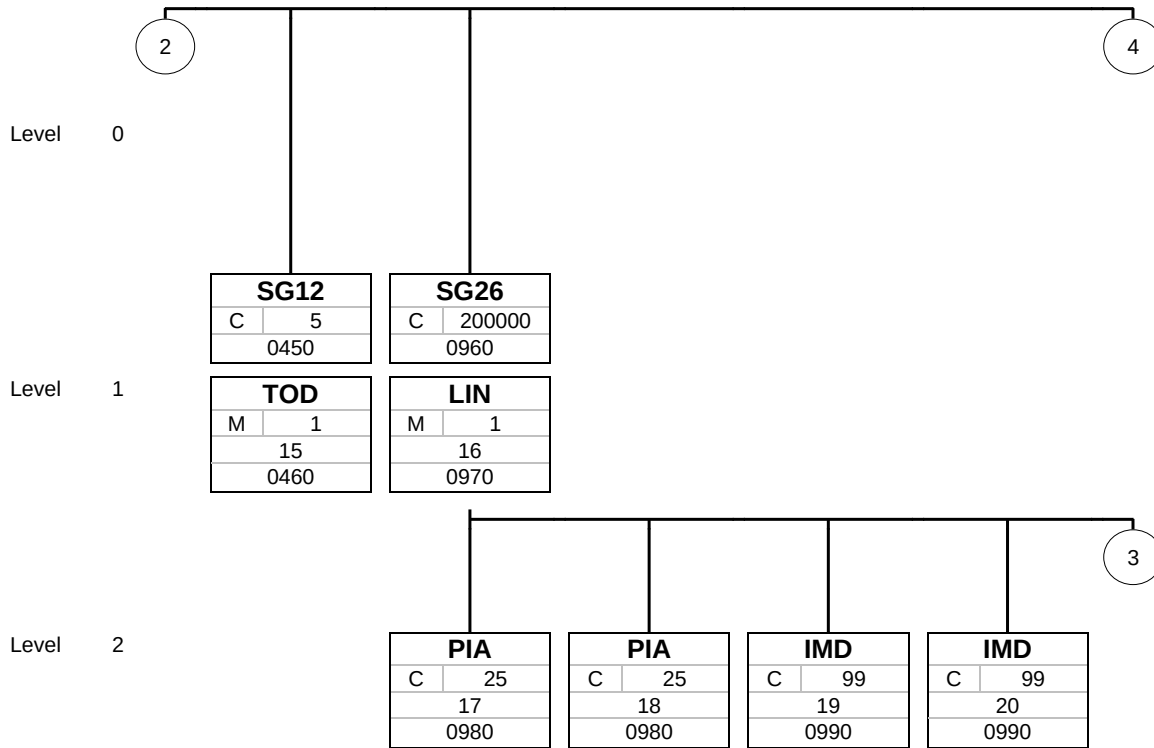

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
 St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
 MaxOcc = Maximum occurrence of the segment/group
 No = Consecutive segment number
 Counter = Counter of segment/group within the standard

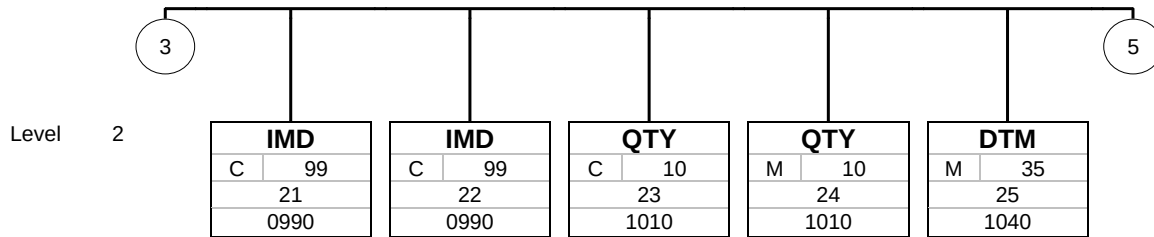

Tag
St MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number

Counter = Counter of segment/group within the standard

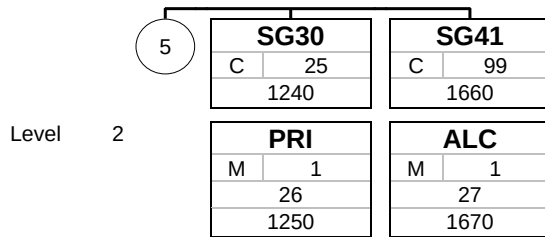

Tag
St MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number

Counter = Counter of segment/group within the standard

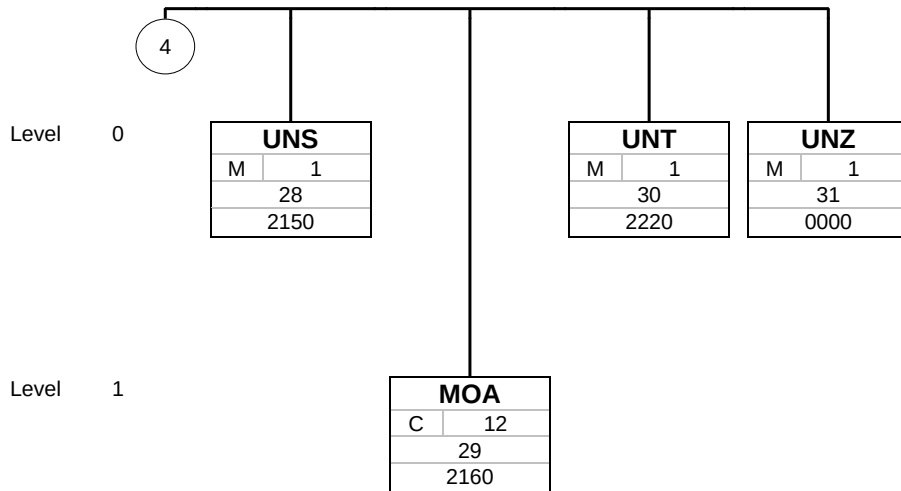

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number

Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0000	1	UNA	C	1	0	Service string advice

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNA				
UNA1	Component data element separator	M an1	M an1	Used as a separator between component data elements contained within a composite data element (default value: ":")
UNA2	Data element separator	M an1	M an1	Used to separate two simple or composite data elements (default value: "+")
UNA3	Decimal notation	M an1	M an1	Used to indicate the character used for decimal notation (default value: ".")
UNA4	Release indicator	M an1	M an1	Used to restore any service character to its original specification (value: "?").
UNA5	Reserved for future use	M an1	M an1	(default value: space)
UNA6	Segment terminator	M an1	M an1	Used to indicate the end of segment data (default value: "'")

Remark:

Provides details about the special characters used in the message.

Example:

UNA:+. ? ' '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	2	UNB	M	1	0	INTERCHANGE HEADER
------	---	------------	---	---	---	---------------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNB				
S001	SYNTAX IDENTIFIER	M	M	
0001	Syntax identifier	M a4	M a4	Used character set. UNOC UN/ECE level C
0002	Syntax version number	M n1	M n1	3 Version 3
S002	INTERCHANGE SENDER	M	M	
0004	Sender identification	M an..35	M an..35	GLN of the sender.
0007	Partner identification code qualifier	C an..4	R an..4	14 EAN International
0008	Address for reverse routing	C an..14	N	Not used
S003	INTERCHANGE RECIPIENT	M	M	
0010	Recipient identification	M an..35	M an..35	GLN of the recipient. Regent will always require its GLN 7609999470806.
0007	Partner identification code qualifier	C an..4	R an..4	14 EAN International
0014	Routing address	C an..14	N	Not used
S004	DATE/TIME OF PREPARATION	M	M	
0017	Date of preparation	M n6	M n6	Date when the message as created. Should follow the format CCYYMM.
0019	Time of preparation	M n4	M n4	Time when the message was created.
0020	Interchange control reference	M an..14	M an..14	Unique identification of the message
S005	RECIPIENT'S REFERENCE PASSWORD	C	N	
0022	Recipient's reference/password	M an..14	N	Not used
0025	Recipient's reference/password qualifier	C an2	N	Not used
0026	Application reference	C an..14	N	Not used
0029	Processing priority code	C a1	N	Not used
0031	Acknowledgement request	C n1	N	Not used
0032	Communications agreement ID	C an..35	R an..35	EDILEKTRO 2007 1.1
0035	Test indicator	C n1	C n1	Test indicator. 1 = test message. Empty = production message.

Remark:

EDIFACT interchange. Provides details on sender and receiver as well as message timestamp, message identification and test message indicator.

Example:

UNB+UNOC:3+999999999990:14+7609999470806:14+191105:0910+4711++++EDILEKTRO 2007 1.1+1'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0010	3	UNH	M	1	0	MESSAGE HEADER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	Sender's unique message reference. Sequence number of the messages in the interchange. DE 0062 in the UNT will be exactly the same. Sender generated.
S009	MESSAGE IDENTIFIER	M	M	
0065	Message type identifier	M an..6	M an..6	ORDRSP Purchase order response message
0052	Message type version number	M an..3	M an..3	D Draft version/UN/EDIFACT Directory
0054	Message type release number	M an..3	M an..3	96A Release 1996 - A
0051	Controlling agency	M an..2	M an..2	UN UN/CEFACT
0057	Association assigned code	C an..6	R an..6	EAN008 EAN Version 008
0068	Common access reference	C an..35	N	Not used
S010	STATUS OF THE TRANSFER	C	N	
0070	Sequence message transfer number	M n..2	N	Not used
0073	First/last sequence message transfer indication	C a1	N	Not used

Remark:

Used to head, identify and specify a message.

Example:

UNH+123456789+ORDRSP:D:96A:UN:EAN008'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0020	4	BGM	M	1	0	Beginning of message

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	Document/message name	C	C	
1001	Document/message name, coded	C an..3	R an..3	231 Purchase order response
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
1000	Document/message name	C an..35	N	Not used
1004	Document/message number	C an..35	R an..35	The order response number.
1225	Message function, coded	C an..3	R an..3	9 Original The message function of the given order response. In case of REGENT only '9' is supported, which is an original order response.
4343	Response type, coded	C an..3	N	Not used

Remark:

Indicates the type and function of a message and the purchase order number.

Example:

BGM+231+123456789+9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0030	5	DTM	M	35	1	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	137 Document/message date/time
2380	Date/time/period	C an..35	R an..35	Date value.
2379	Date/time/period format qualifier	C an..3	R an..3	102 CCYYMMDD

Remark:

The date, when the order response was issued.

Example:

DTM+137:20191115:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG1	M	10	1	RFF-DTM
0090	6	RFF	M	1	1	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	ON Order number (buyer)
1154	Reference number	C an..35	M an..35	
1156	Line number	C an..6	N	Not used
4000	Reference version number	C an..35	N	Not used

Remark:

Used to indicate the purchase order number to which the entire purchase order response refers.

Example:

RFF+ON:BNU1056116-3'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG1	M	10	1	RFF-DTM
0100	7	DTM	M	5	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	171 Reference date/time
2380	Date/time/period	C an..35	M an..35	Order date (buyer)
2379	Date/time/period format qualifier	C an..3	M an..3	102 CCYYMMDD

Remark:

The date of the purchase order.

Example:

DTM+171:20191104:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0140		SG3	C	99	1	NAD
		Details of the buyer				
0150	8	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	GLN of the buyer.
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	R an..3	9 EAN (International Article Numbering association)
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
C080	Party name	C	N	
3036	Party name	M an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3045	Party name format, coded	C an..3	N	Not used
C059	Street	C	N	
3042	Street and number/p.o. box	M an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3164	City name	C an..35	N	Not used
3229	Country sub-entity identification	C an..9	N	Not used
3251	Postcode identification	C an..9	N	Not used
3207	Country, coded	C an..3	N	Not used

Remark:
Identification of the buyer.

Example:
NAD+BY+7609999470806::9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0140		SG3	C	99	1	NAD-SG6
		Details of the supplier				
0150	9	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	SU Supplier
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	GLN of the supplier
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	R an..3	9 EAN (International Article Numbering association)
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
C080	Party name	C	N	
3036	Party name	M an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3045	Party name format, coded	C an..3	N	Not used
C059	Street	C	N	
3042	Street and number/p.o. box	M an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3164	City name	C an..35	N	Not used
3229	Country sub-entity identification	C an..9	N	Not used
3251	Postcode identification	C an..9	N	Not used
3207	Country, coded	C an..3	N	Not used

Remark:

Identification of the supplier

Example:

NAD+SU+9999999999990::9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0240		SG6	C	5	2	CTA-COM
0250	10	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function, coded	C an..3	R an..3	ODP Department/person responsible for processing purchase order (EAN Code)
C056	Department or employee details	C	C	
3413	Department or employee identification	C an..17	R an..17	Name of the responsible agent for processing the purchase order.
3412	Department or employee	C an..35	N	Not used

Remark:

Details of the responsible agent for processing the purchase order.

Example:

CTA+ODP+John Doe'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0240		SG6	C	5	2	CTA-COM
0260	11	COM	C	5	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication number	M an..512	M an..512	Telephone number of the responsible agent for processing the purchase order.
3155	Communication channel qualifier	M an..3	M an..3	TE Telephone

Remark:

Telephone number of the responsible agent for processing the purchase order.

Example:

COM+0041 111111111:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0240		SG6	C	5	2	CTA-COM
0260	12	COM	C	5	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication number	M an..512	M an..512	Email address of the responsible agent for processing the purchase order.
3155	Communication channel qualifier	M an..3	M an..3	EM Electronic mail

Remark:

Email address of the responsible agent for processing the purchase order.

Example:

COM+john@doe.com:EM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0140		SG3	C	99	1	NAD
		Details of the goods recipient				
0150	13	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	DP Delivery party
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	GLN of the goods recipient.
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	R an..3	9 EAN (International Article Numbering association)
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
C080	Party name	C	N	
3036	Party name	M an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3045	Party name format, coded	C an..3	N	Not used
C059	Street	C	N	
3042	Street and number/p.o. box	M an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3164	City name	C an..35	N	Not used
3229	Country sub-entity identification	C an..9	N	Not used
3251	Postcode identification	C an..9	N	Not used
3207	Country, coded	C an..3	N	Not used

Remark:

Identification of the goods recipient

Example:

NAD+DP+9999999999991::9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
	0310	SG8	C	5	1	CUX
	0320	14	CUX	M	1	1 Currencies

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CUX				
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	2 Reference currency
6345	Currency, coded	C an..3	R an..3	Currency of the purchase order (e.g., EUR = Euro, CHF = Swiss Francs, etc.)
6343	Currency qualifier	C an..3	R an..3	9 Order currency
6348	Currency rate base	C n..4	N	Not used
C504	Currency details	C	N	
6347	Currency details qualifier	M an..3	N	Not used
6345	Currency, coded	C an..3	N	Not used
6343	Currency qualifier	C an..3	N	Not used
6348	Currency rate base	C n..4	N	Not used
5402	Rate of exchange	C n..12	N	Not used
6341	Currency market exchange, coded	C an..3	N	Not used

Remark:

Information about the currency being used in this message.

Example:

CUX+2 : CHF : 9 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0450		SG12	C	5	1	TOD
0460	15	TOD	M	1	1	Terms of delivery or transport

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TOD				
4055	Terms of delivery or transport function, coded	C an..3	C an..3	6 Delivery condition
4215	Transport charges method of payment, coded	C an..3	N	Not used
C100	Terms of delivery or transport	C	C	
4053	Terms of delivery or transport, coded	C an..3	R an..3	EXW Ex works FCA Free carrier - Named point FAS Free alongside ship FOB Free on Board - Named port of shipment CFR Cost & Freight CIF Cost, Insurance, Freight to named destination CPT Freight, Carriage paid to destination CIP Freight, Carriage, Insurance to destination DAF Delivery at frontier - Named place DES Delivered Ex ship - Named port of destination DEQ Delivered Ex Quay - Duty paid, Named port DAP Delivered At Place DDP Delivered duty paid to destination DAT Delivered At Terminal The terms of delivery or transport encoded as INCOTERMS.
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
4052	Terms of delivery or transport	C an..70	N	Not used
4052	Terms of delivery or transport	C an..70	N	Not used

Remark:

Terms of delivery, provided as INCOTERMS

Example:

TOD+6++CIF'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0970	16	LIN	M	1	1	Line item

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LIN				
1082	Line item number	C n..6	R n..6	For the receiving system it is important to correctly process the number of the purchase order including all leading zeros.
1229	Action request/notification, coded	C an..3	M an..3	5 Accepted without amendment 6 Accepted with amendment 7 Not accepted The action code gives information about the acceptance of the ordered line item.
C212	Item number identification	C	C	
7140	Item number	C an..35	R an..35	The buyer's article number. For the receiving system it is important to correctly process the buyer's article number of the purchase order. To ensure a successful import, only the buyer's article number is required. All other article numbers (PIA) are for additional information only.
7143	Item number type, coded	C an..3	R an..3	BP Buyer's part number
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C829	Sub-line information	C	N	
5495	Sub-line indicator, coded	C an..3	N	Not used
1082	Line item number	C n..6	N	Not used
1222	Configuration level	C n..2	N	Not used
7083	Configuration, coded	C an..3	N	Not used

Remark:

This segment is used to identify the responded item.

Example:

LIN+10+5+1017.7183:BP'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0980	17	PIA	C	25	2	Additional product id

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PIA				
4347	Product id. function qualifier	M an..3	M an..3	5 Product identification
C212	Item number identification	M	M	
7140	Item number	C an..35	R an..35	For some of its products REGENT maintains also an old product number. The supplier can provide this old product number in this field as an additional product reference. For the unique identification of a purchase order item, the supplier shall use the product reference from the LIN segment only.
7143	Item number type, coded	C an..3	R an..3	IN Buyer's item number
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used

Remark:

Used to provide additional details of the confirmed product.

Example:

PIA+5+PLC13.84:IN'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0980	18	PIA	C	25	2	Additional product id

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PIA				
4347	Product id. function qualifier	M an..3	M an..3	5 Product identification
C212	Item number identification	M	M	
7140	Item number	C an..35	R an..35	The supplier can provide his article number in this field.
7143	Item number type, coded	C an..3	R an..3	SA Supplier's article number
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	Item number identification	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used

Remark:

Used to provide additional details of the confirmed product.

Example:

PIA+5+871150062086670:SA'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0990	19	IMD	C	99	2	Item description

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IMD				
7077	Item description type, coded	C an..3	R an..3	F Free-form
7081	Item characteristic, coded	C an..3	N	Not used
C273	Item description	C	C	
7009	Item description identification	C an..17	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
7008	Item description	C an..35	R an..35	
7008	Item description	C an..35	N	Not used
3453	Language, coded	C an..3	N	Not used
7383	Surface/layer indicator, coded	C an..3	N	Not used

Remark:

Free text description of the product. Note that the length of the free text description must not exceed 1024 characters (including whitespaces).

Example:

IMD+F++:::Kompaktfluoreszenzlampe'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0990	20	IMD	C	99	2	Item description

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IMD				
7077	Item description type, coded	C an..3	R an..3	B Code and text
7081	Item characteristic, coded	C an..3	N	Not used
C273	Item description	C	C	
7009	Item description identification	C an..17	R an..17	DRNR Drawing number
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
7008	Item description	C an..35	R an..35	The drawing number
7008	Item description	C an..35	N	Not used
3453	Language, coded	C an..3	N	Not used
7383	Surface/layer indicator, coded	C an..3	N	Not used

Remark:

Drawing number

Example:

IMD+B++DRNR:::CAD 00094065'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0990	21	IMD	C	99	2	Item description

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IMD				
7077	Item description type, coded	C an..3	R an..3	B Code and text
7081	Item characteristic, coded	C an..3	N	Not used
C273	Item description	C	C	
7009	Item description identification	C an..17	R an..17	DRFT Drawing format
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
7008	Item description	C an..35	R an..35	The drawing format
7008	Item description	C an..35	N	Not used
3453	Language, coded	C an..3	N	Not used
7383	Surface/layer indicator, coded	C an..3	N	Not used

Remark:

Drawing format

Example:

IMD+B++DRFT:::A4'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
0990	22	IMD	C	99	2	Item description

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IMD				
7077	Item description type, coded	C an..3	R an..3	B Code and text
7081	Item characteristic, coded	C an..3	N	Not used
C273	Item description	C	C	
7009	Item description identification	C an..17	R an..17	DRID Drawing index
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
7008	Item description	C an..35	R an..35	The drawing index
7008	Item description	C an..35	N	Not used
3453	Language, coded	C an..3	N	Not used
7383	Surface/layer indicator, coded	C an..3	N	Not used

Remark:

Drawing index

Example:

IMD+B++DRID:::B'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
1010	23	QTY	C	10	2	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	Quantity details	M	M	
6063	Quantity qualifier	M an..3	M an..3	21 Ordered quantity
6060	Quantity	M n..15	M n..15	The ordered quantity
6411	Measure unit qualifier	C an..3	R an..3	PCE Piece (EAN Code)

Remark:

The ordered quantity.

Example:

QTY+21:12:PCE'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
1010	24	QTY	M	10	2	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	Quantity details	M	M	
6063	Quantity qualifier	M an..3	M an..3	131 Delivery quantity
6060	Quantity	M n..15	M n..15	The confirmed quantity
6411	Measure unit qualifier	C an..3	R an..3	PCE Piece (EAN Code)

Remark:

The confirmed quantity.

Example:

QTY+131:12:PCE '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0960		SG26	C	200000	1	LIN-PIA-IMD-QTY-DTM-SG30-SG41
1040	25	DTM	M	35	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	69 Delivery date/time, promised for
2380	Date/time/period	C an..35	R an..35	Date value
2379	Date/time/period format qualifier	C an..3	R an..3	102 CCYYMMDD

Remark:

The confirmed delivery date.

Example:

DTM+69:20191115:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1240		SG30	C	25	2	PRI
1250	26	PRI	M	1	2	Price details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PRI				
C509	Price information	C	C	
5125	Price qualifier	M an..3	M an..3	AAA Calculation net
5118	Price	C n..15	R n..15	The confirmed price of the ordered product. The price is always provided on a per-one piece basis. The price is provided as calculation net, thus any surcharges and allowances have already been applied to the price.
5375	Price type, coded	C an..3	N	Not used
5387	Price type qualifier	C an..3	N	Not used
5284	Unit price basis	C n..9	C n..9	The price is always provided on a per-one-piece basis.
6411	Measure unit qualifier	C an..3	R an..3	PCE Piece (EAN Code)
5213	Sub-line price change, coded	C an..3	N	Not used

Remark:

The confirmed price of the ordered product.

Example:

PRI+AAA:9.98:::1:PCE'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1660		SG41	C	99	2	ALC
1670	27	ALC	M	1	2	Allowance or charge

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
ALC				
5463	Allowance or charge qualifier	M an..3	M an..3	A Allowance
C552	Allowance/charge information	C	C	
1230	Allowance or charge number	C an..35	R an..35	The granted allowance in percent.
5189	Charge/allowance description, coded	C an..3	N	Not used
4471	Settlement, coded	C an..3	N	Not used
1227	Calculation sequence indicator, coded	C an..3	N	Not used
C214	Special services identification	C	C	
7161	Special services, coded	C an..3	R an..3	DI Discount
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
7160	Special service	C an..35	N	Not used
7160	Special service	C an..35	N	Not used

Remark:

Information on the allowance, which has been granted on the line item price. Note, that the allowance is already deducted from the price and this segment is for informational purposes only.

Example:

ALC+A+3.5+++DI'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
2150	28	UNS	M	1	0	SECTION CONTROL

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNS				
0081	Section identification	M a1	M a1	S Detail/summary section separation

Remark:

Example:

UNS+S '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
2160	29	MOA	C	12	1	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	79 Total line items amount
5004	Monetary amount	C n..18	C n..18	The sum of all line item amounts
6345	Currency, coded	C an..3	N	Not used
6343	Currency qualifier	C an..3	N	Not used
4405	Status, coded	C an..3	N	Not used

Remark:

Value of the entire order response.

Example:

MOA+79:119.76'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
2220	30	UNT	M	1	0	MESSAGE TRAILER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNT				
0074	Number of segments in a message	M n..6	M n..6	
0062	Message reference number	M an..14	M an..14	

Remark:

Example:

UNT+32+123456789'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0000	31	UNZ	M	1	0	INTERCHANGE TRAILER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNZ				
0036	Interchange control count	M n..6	M n..6	
0020	Interchange control reference	M an..14	M an..14	

Remark:

Example:

UNZ+1+4711'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used